

CARTRIDGE FILTER



Technical Data

- Material: Polyester, 270g/m²
- Thickness: 0.58mm
- Air permeability: 10~15cc/cm²/sec
- Endurable temp: 120°C


Features

- Large filtration area
- Maximum dust collection efficiency
- Compact design
- Operating at a pressure of less than 4.0kg/cm²
- Possible to design a filtration speed of less


Utility

- Dust of stome processing
- Chemical and Pharmacy dust
- Metal and Wood grinding dust
- Industrial dust and Various types of dust

Top Joint

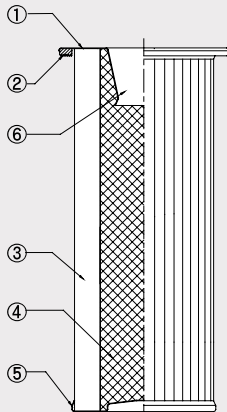

Bottom Joint

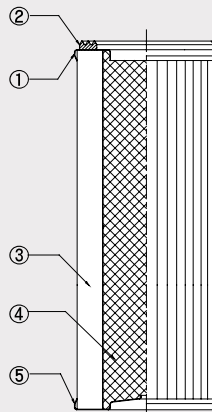

NO	DESCRIPTION
1	UPPER CAP
2	PACKING
3	FILTER
4	EXPENDED METAL
5	UNDER CAP
6	VENTURI

■ DIMENSIONS (mm)

MODEL	SIZE Outer(Inner) x Length	FILTRATION AREA(m ²)	WEIGHT	TUBE SHEET HOLE SIZE	
				Top Joint	Bottom Joint
JICF - 1510	ø150(75)×1000L	3.0	2.15	ø155	ø 75
JICF - 2005	ø200(100)×500L	2.0	1.5	ø205	ø100
JICF - 2010	ø200(100)×1000L	4.0	3	ø205	ø100
JICF - 2015	ø200(100)×1500L	6.0	4.5	ø205	ø100
JICF - 4010	ø400(200)×1000L	7.2	4.8	ø405	ø200

- Separate order spec of customer can be produced.