

# REVERSE TRANSMITTER


SSN-RVS



A converter is in use of providing the isolation and reverse DC signal output proportional to the input signal.

- Matching a manipulating signal with the valve action.
- 1 or 2 outputs are available from 1 input.
- Contains overvoltage protection circuit.
- Transformer isolation type.

## MODEL & SUFFIX CODE SELECTION

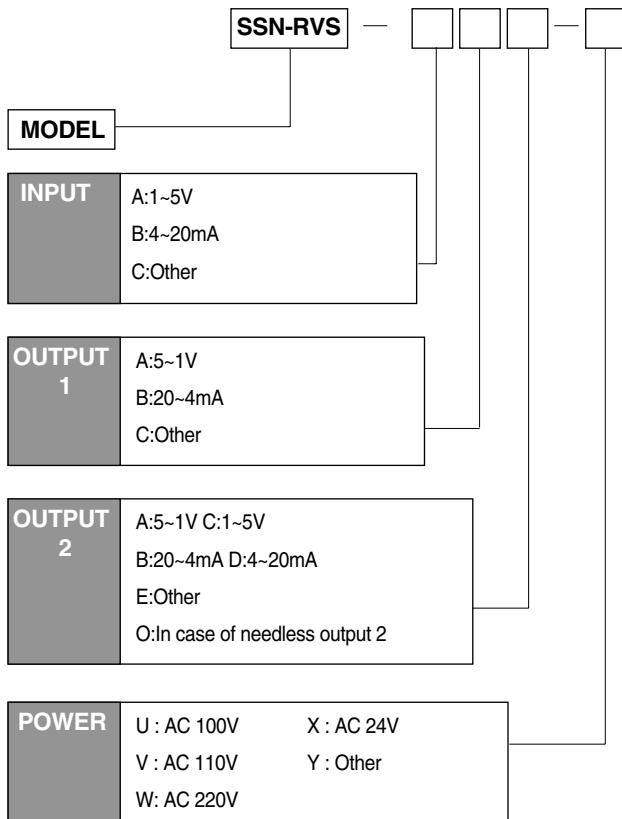

## GENERAL SPECIFICATIONS

Isolation/Type	Input to output to power/Transformer isolation type		
Power Supply	AC rating ±10%, approx 3.5VA		
Accuracy	±0.15%(Max)		
Temp Coefficient	±0.015% / °C(±0.008%/°F)		
Linearity	±0.02% F.S		
Insulation Resistance	Greater than 100MΩ with DC 500V		
Dielectric Strength	Input — Power	AC 2500V	1 minute
	Input — Output	AC 1000V	
	Output 1 — Output 2		
	GND — Power		
Front Adjustments	Zero and Span ±5%		
Overrange Output	approx -10% ~ 110% at DC 1~5V		
Response Time	≤ 0.5 sec (0~90%)		
Operating Temperature/Humidity	-20~60°C / 90%(N.C)		
Storage Temperature/Humidity	-20°C~80°C / 95%(N.C)		
Dimensions	W40×H129×D138(mm)		
Case Material	Aluminum		
Weight	about 400g		
Mounting	Wall mounting		

## INPUT & OUTPUT SPECIFICATIONS

### Input Impedance


Input	Impedance
4~20mA	250Ω
1~5V	1MΩ(Min)

### Output Load Resistance

Output	1 Point	2 Point		Remark
	Output	Output-1	Output-2	
20~4mA	700Ω	600Ω	350Ω	(Max)
5~1V	5kΩ	5kΩ	5kΩ	(Min)

## BLOCK DIAGRAM

### 1 Point Output

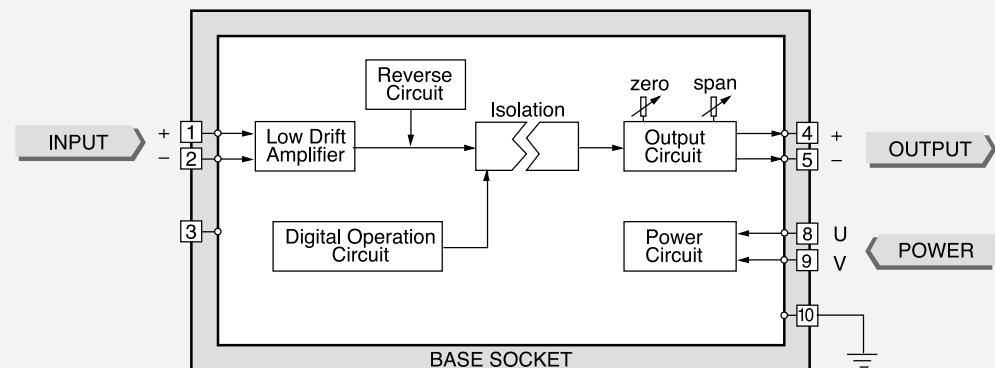

### 2 Point Output

