
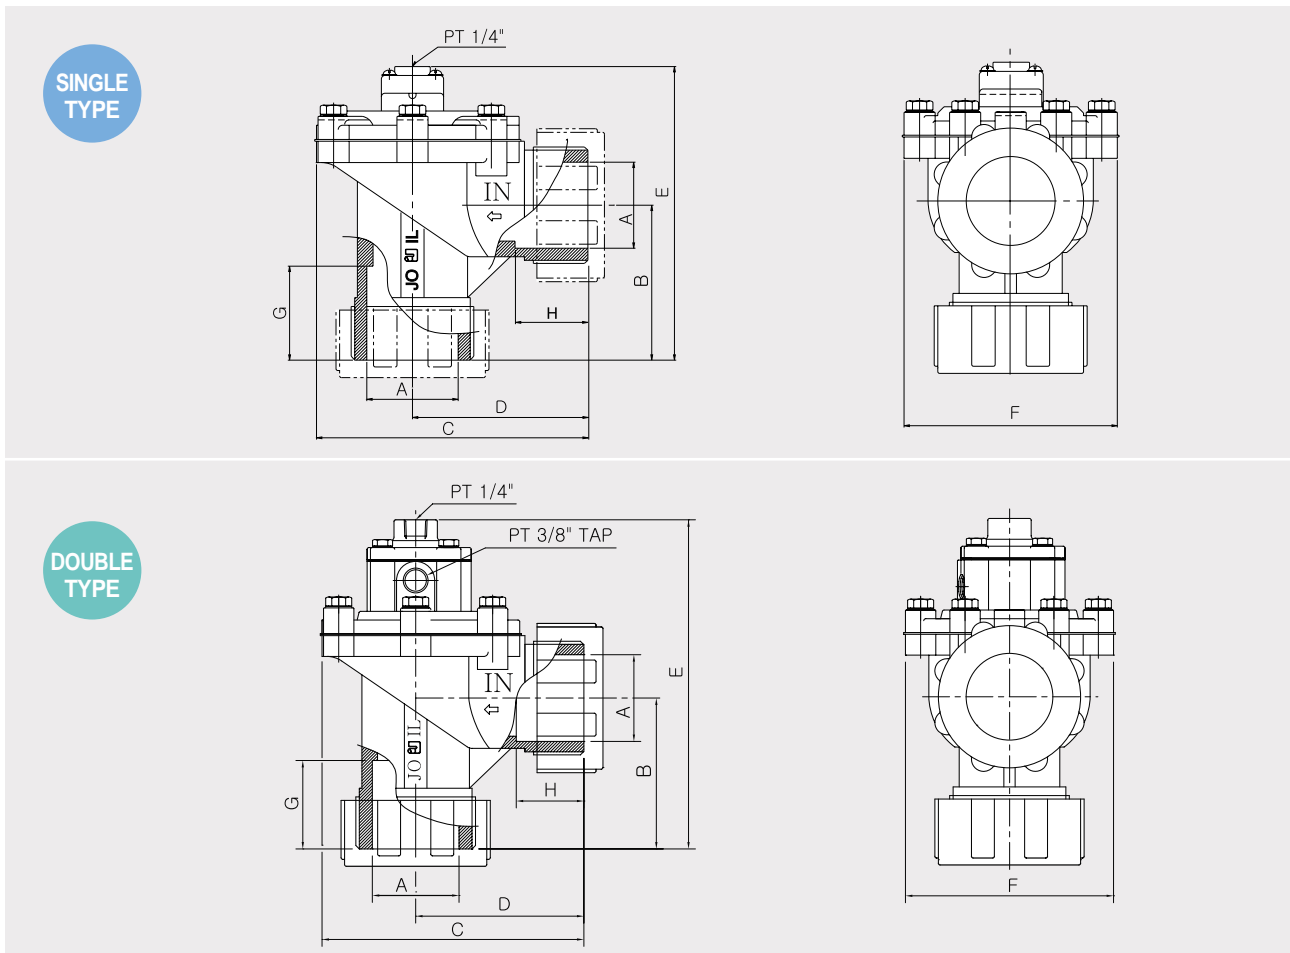


JICR COUPLING REMOTE TYPE

JOIL valve's common characteristics (2)

A timer controller for quick opening and closing of valve and a waterproofed, up to 180°C heat resistance coil are used.

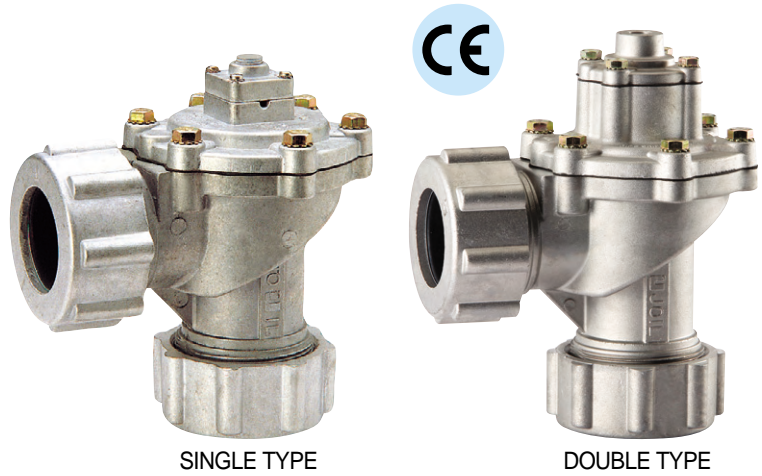

■ DIMENSIONS(mm)

MODEL	C.V FACTOR	OPERATING PRESSURE		ORIFICE A	B	C	D	E	F	G	H	Diaphragm Q'TY	Weight (kg)
		MIN	MAX										
JICR 20	14.3	0.5	8	3/4"	60.5	101.5	69.5	114	64	39.5	32	1	0.55
JICR 25	24.4	0.5	8	1"	70	118	78	133	80	38	32	1	1
JICR 40(S)	58.4	0.5	8	1-1/2"	88	151.5	97	165	121	53	40	1	1.75
JICR 40(D)	60.9	0.5	8	1-1/2"	88	151.5	97	188.8	121	53	40	2	1.95